

TILE POPPER™



AMERICAN COATINGS CORPORATION

Serving the Environmental Control Industry Since 1979

(800) 533-0151

The **TILE POPPER™** is a high performance tool which saves time, cuts effort and yields quick results. Its unique design provides great mobility with NO mechanical breakdowns.

The **TILE POPPER™**'s 1 inch, **solid steel** construction delivers tremendous power and long-term durability. Fabricated by certified welders, the **TILE POPPER™** is manufactured with full penetration welds in critical areas for outstanding strength and reliability.

Used with our extra sharp, heat-treated steel blades, the **TILE POPPER™** provides fast and easy removal of a variety of materials, including:

- Vinyl & Asphalt Tile**
- ★
- Linoleum**
- ★
- Concrete Spurs**
- ★
- Adhesives & Mastics**
- ★
- Roofing**
- ★
- Glued-Down Carpeting**
- ★
- Sheet Goods**
- ★
- Parquet Flooring**
- ★
- Plant Roots**

The **TILE POPPER™** is more effective than anything being used to date. It cuts labor costs, eliminates "down time" and there are NO expensive replacement parts. The **TILE POPPER™** is a tool which provides immediate returns on a small investment.



Vinyl & Asphalt Tile



Adhesive & Mastics




Floor Tile



Glued-Down Carpeting

Easy as 1-2-3 □

With the **TILE POPPER™**, there is no loss of time on the job. Its easy assembly allows you to change or interchange blades with a minimum of effort. Just loosen two carriage bolts, replace the blade and in just minutes, the **TILE POPPER™** is ready to go again. The blades can be re-sharpened at your own convenience.


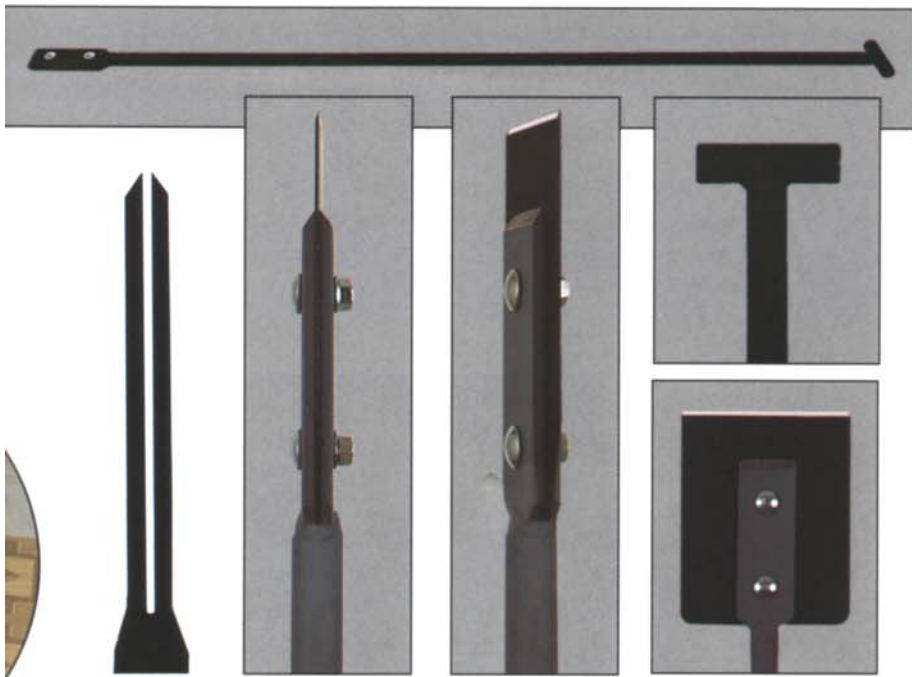


The Bar

- Solid Steel Bar, 63" long, imparts tremendous strength.
- Up to 80,000 P.S.I. Tensile Strength
- "T" Handle provides a great grip and exceptional leverage.
- Tapered flange with "rounded" carriage bolt assembly virtually eliminates material snags.
- "Flame cut" to allow full penetration welds in critical areas.

The Blade

- Precision made from Chrome Vanadium Steel, the finest blade steel available.
- Heat treated and tempered to provide a long lasting edge with strength and flexibility.
- Pre-Sharpended to an extra sharp finish.
- Can be re-sharpened as needed.
- Easy to remove and install. Just loosen two carriage bolts.
- Each size blade is engineered to fit the same bar.

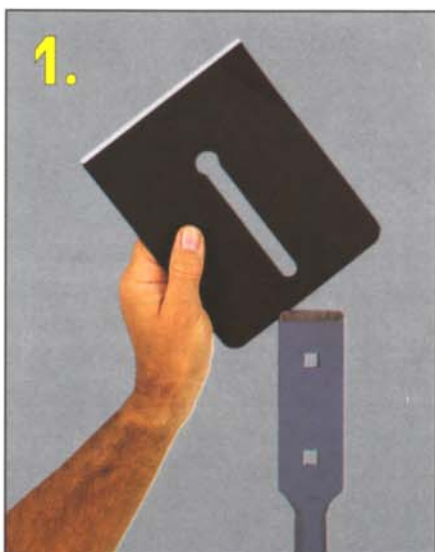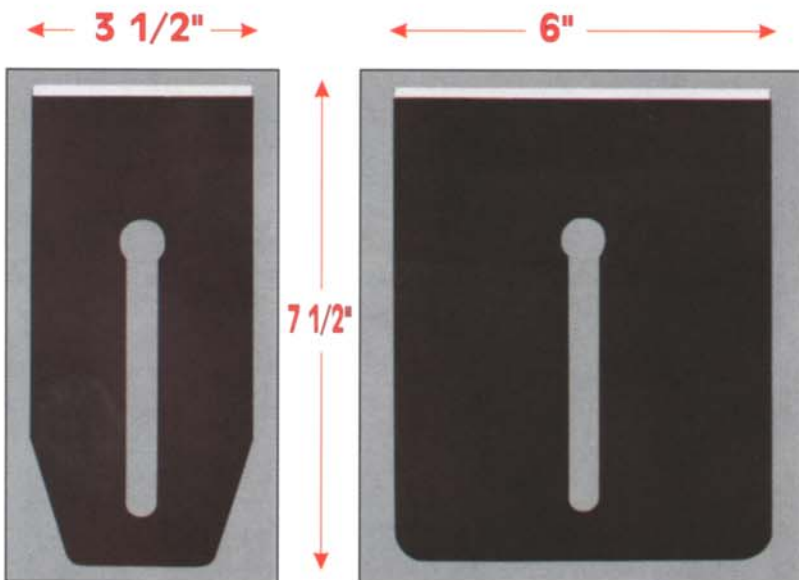

ITEM	PART NUMBER	DESCRIPTION	SIZE
Popper Bar	TBAR-63-FL	Solid Steel Bar with T-Handle	63" Long X 1.0" Diameter
Popper Blade	TSCR-35-FL	Heat Treated CV-Steel Blade	3.5" Wide X 7.5" Long
Popper Blade	TSCR-60-FL	Heat Treated CV-Steel Blade	6.0" Wide X 7.5" Long



Ice



Weeds



Plant Roots



Floor Tile



Roofing

AMERICAN COATINGS CORPORATION

Serving the Environmental Control Industry Since 1979

(800) 533-0151

